

# PAVIGYM PREMIUM VULCANIZED RUBBER

THE BASIS OF FITNESS



## ENDURANCE S&S

Endurance S&S tiles are the ultimate in Premium Vulcanized Rubber flooring. With an impressive 22mm (.866 in) thickness, this heavy duty vulcanized rubber tile will stand up to the most punishing workouts. Where S&S tiles are a perfect solution for absorbing shock from heavy lifting, they are equally proficient at abating and dispersing sound with an IIC rating of 54.


The closed cell structure of the tiles are completely non-absorbent and can be easily cleaned and disinfected to provide a virus and bacteria free workout surface. With a precision cut interlocking system, these tiles are able to be installed with an adhesive free and loose lay process.

With its shock absorbing recycled rubber base and premium vulcanized top, Endurance S&S tiles combine the best in heavy duty shock and sound absorption and high end premium aesthetics. Endurance S&S tiles are quite simply the highest grade interlocking tile on the market.



## WHERE TO USE:

- Any Area That Requires Noise & Impact Abatement
- Cardio Areas
- Selectorized Areas
- Free Weight Areas

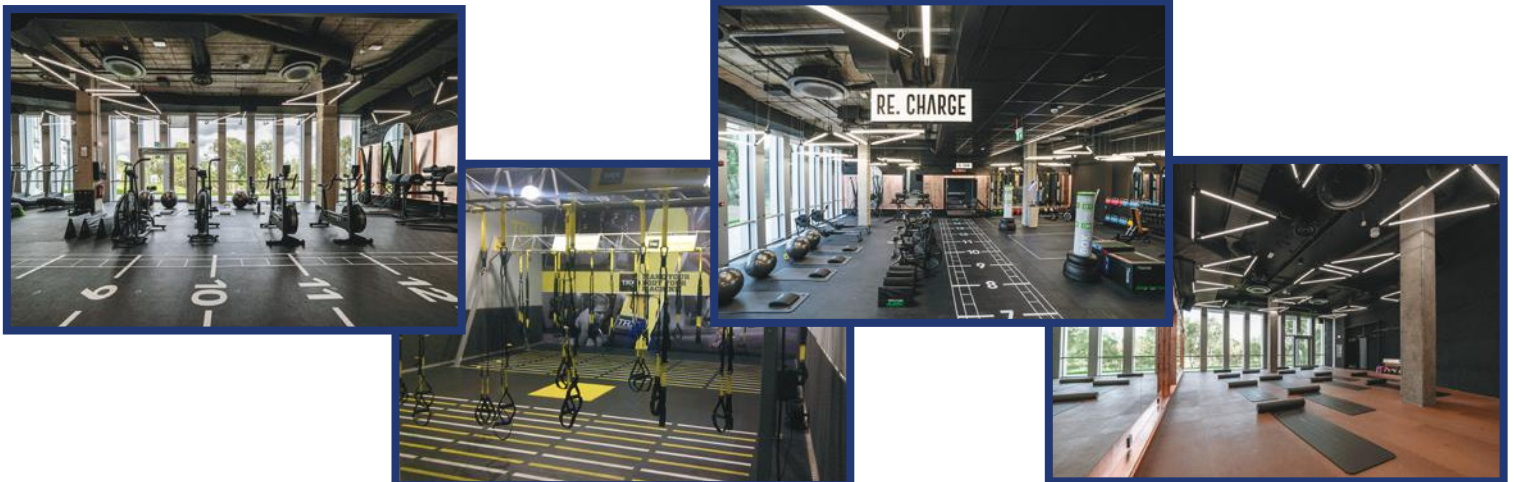

For more information please contact Surface Direct at:  
email: [info@surfacedirect.com](mailto:info@surfacedirect.com) • [www.surfacedirect.com](http://www.surfacedirect.com)





**Non-Stock Product 10-14 week lead time**



WALNUT



WENGUE



JET BLACK

**CUSTOM COLORS AVAILABLE  
FOR ORDER OVER 750 SQ/FT**



CYAN



RED



BEECHWOOD



LIME

**In-Stock Product  
3 Day Ship**



BLACK  
MARBLE



STONE  
GREY

**PRIORITY PRODUCT\***

**PRODUCT LINE:**

- Performance
- Endurance
- Motion
- Endurance S&S
- Extreme (Pure Stone & Onyx only)
- Extreme S&S (Pure Stone & Onyx only)

**COLORS:**

- Wengue (Excluding Endurance S&S)
- Black Marble (Excluding Motion)
- Stone Grey


**Applies to in-stock product only**

**Non-Stock product requires a 10-14 week ship time.**

**\* Ships in 3 Days.  
See weekly stock report**

**ALL TILES  
90cm x 90cm  
CENTER**

**Thickness  
22mm / 0.866 in**

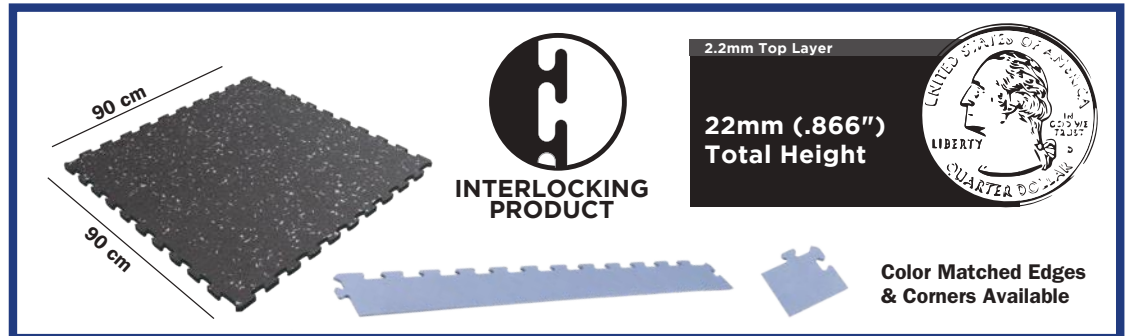

**Lay & Play**

For a no hassle installation with minimal trimming or on-site cutting you can work with our sales and engineering team to create a custom cut to fit solution for your facility. Lay it down and go!



**WHY PAVIGYM?**

- Noise & Impact Abatement
- No Rubber Odor
- Vulcanized Strength
- Loose Lay Installation (No Adhesive Required)
- Ultra-Tight Interlock
- Commercial Grade Durability
- Easy to Clean
- Color Matched Beveled Edges
- Customization Available

A post installation cleaner is required for all Pavigym products.



For more information please contact Surface Direct at:  
email: [info@surfacedirect.com](mailto:info@surfacedirect.com) • [www.surfacedirect.com](http://www.surfacedirect.com)